


DOOSAN 825KVA
MECC-ALTE
DSE 732 CONTROL



ISO8528

This generator set has been designed to meet ISO 8528 regulation.

SZUTEST

This generator set is manufactured in facilities certified to ISO 9001.



This generator set is available with CE certification.

2000/14/EC

Enclosed product is tested according to EU noise legislation 2000/14/EC

3 Phase Ratings, 50 Hz, PF 0,8

Voltage	Standby Rating (ESP)		Prime Rating (PRP)		
	kVA	kW	kVA	kW	Amp
400/230	825,00	660,00	750,00	600,00	1083,00

Standby Rating (ESP): Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. ESP is in accordance with ISO 8528. Overload is not allowed.

Prime Rating (PRP): Applicable for supplying power to varying electrical load for unlimited hours. PRP is in accordance with ISO 8528. 10 % overload capability is available for a period of 1 hour within 12-hour period of operation, in accordance with ISO 3046.

STANDARD SPECIFICATIONS

- Water cooled, Diesel engine
- Radiator with mechanical fan
- Protective grille for rotating and hot parts
- Electric starter and charge alternator
- Starting battery (with lead acid) including rack and cables
- Engine coolant heater
- Base frame design incorporates an integral fuel tank and anti-vibration isolators
- Flexible fuel connection hoses
- Single bearing, class H alternator
- Industrial exhaust silencer and steel bellows supplied separately (for open sets)
- Static battery charger
- Manual for application and installation

Engine : Doosan
Alternator : Mecc Alte
Control System : P 732 control system

➤ DIESEL ENGINE SPECIFICATIONS

Manufacturer		Doosan		
Model		DP222LC		
No. of Cylinders and Build		12-cylinder, V - Type		
Aspiration and Cooling		Turbo Charged and After Cooled		
Maximum Standby Power		1500 rpm		
		723,00 kW [969,00HP]		
Total Displacement	L	21,927		
Bore and Stroke	mm	128 x 142		
Compression Ratio		15,0:1		
Rated Speed (rpm)	rpm	1500		
Governor		Electronic		
Oil Capacity	L	40,00		
Coolant Capacity	L	134,80		
Intake Air Flow	m ³ /min.	45,00		
Radiator Cooling Air	m ³ /min.	860,00		
Exhaust Gas Flow	m ³ /min.	108,00		
Exhaust Gas Temperature	° C	502,00		
Start System		24 V d.c.		
Fuel Consumption	Load	%100	%75	%50
	L/h	161,00	119,10	79,30

➤ ALTERNATOR SPECIFICATIONS


Make		Mecc Alte		
Model		ECO 40-VL/4		
Frequency	Hz	50		
Power	kW	750,00		
Design		Brushless, 4 poles		
Cos Phi		0,80		
Phase		3		
Voltage	V	400/230		
Current	A	1083,00		
Insulation Class		H		
Stator		2 / 3 steps		
Rotor		Single Bearing System, Flexible Disc		
Excitation System		Electronic (AVR)		

➤ DIEMENSIONS AND WEIGHT

Canopy	Dry Weight	Lenght	Width	Height	Tank Capacity
	kg.	mm.	mm.	mm.	L
MS 85	5535	5297	1606	2656	1000

Engine : Doosan
Alternator : Mecc Alte
Control System : P 732 control system

1 P 732 control system - Control System

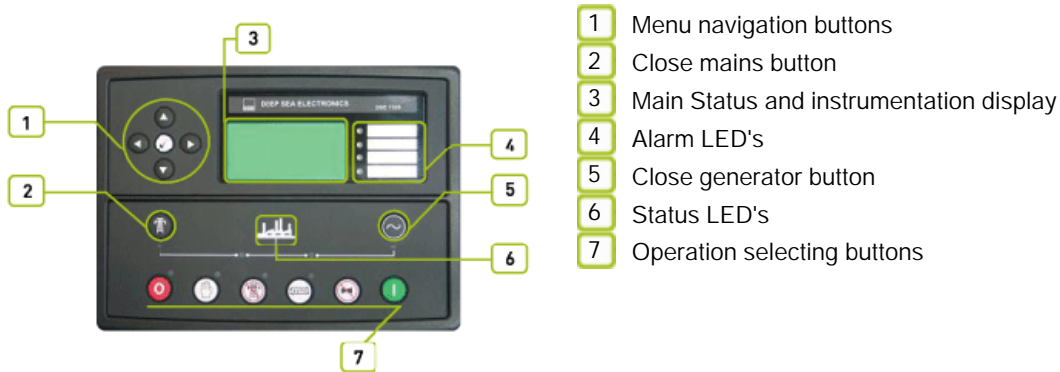

2 Devices

DSE, model 7320 Auto Mains Failure control module
Static battery charger
Emergency stop push button and fuses for control circuits

3 Construction and Finish

Components installed in sheet steel enclosure. Phosphate chemical, pre-coating of steel provides corrosion resistant surface
Polyester composite powder topcoat forms high gloss and extremely durable finish
Lockable hinged panel door provides for easy component access

4 Installation

Control panel is mounted generating set baseframe on robust steel stand or power module.
Located at side of generating set with properly panel visibility.

5 Generating Set Control Unit

The DSE 7320 control module is a standard addition to our generator sets from 220 kVA upwards and it has been designed to start and stop diesel and gas generating sets that include electronic and non electronic engines. The DSE 7320 includes the additional capability of being able to monitor a mains (utility) supply and is therefore suitable for controlling a standby generating set in conjunction with an automatic transfer switch. The DSE 7320 also indicates operational status and fault conditions, automatically shutting down the generating set and indicating faults by means of its LCD display on the front panel.

Standard Specifications

Microprocessor controlled
132 x 64 pixel LCD display makes information easy to read
Front panel programming and also via PC software
Soft touch membrane keypad and five key menu navigation
Remote communications via RS232, RS485 and ethernet and SMS messaging
Event logging (50) showing date and time
Multiple date and time engine exercise mode and maintenance scheduler
Engine block heater control.
Controls: stop, manual, auto, test, start, mute lamb test/transfer to generator, transfer to mains, menu navigation.

Engine : Doosan
Alternator : Mecc Alte
Control System : P 732 control system

Instruments

ENGINE
Engine speed
Oil pressure
Coolant temperature
Run time
Battery volts
Engine maintenance due
GENERATOR
Voltage (L-L, L-N)
Current (L1-L2-L3)
Frequency
Earth current
kW
Pf
kVAr
kWh, kVAh, kVArh
Phase sequence
MAINS
Voltage (L-L, L-N)
Frequency

Protection Circuits

WARNING
Charge failure
Battery under voltage
Fail to stop
Low fuel level (opt.)
kW over load
Negative phase sequence
Loss of speed signal
PRE-ALARMS
Low oil pressure
High engine temperature
Low engine temperature
Over /Under speed
Under/over generator frequency
Under/over generator voltage
ECU warning
SHUT DOWNS
Fail to start
Emergency stop
Low oil pressure
High engine temperature
Low coolant level
Over /Under speed
Under/over generator frequency
Under/over generator voltage
Oil pressure sensor open
Phase rotation
ELECTRICAL TRIP
Earth fault
kW over load
Generator over current
Negative phase sequence

Options

High oil temperature shut down
Low fuel level shut down
Low fuel level alarm
High fuel level alarm
EXPANSION MODULES
Editional LED module (2548)
Expension relay module (2157)
Expansion input module (2130)

Standards


Electrical Safety / EMC compatibility
BS EN 60950 Electrical business equipment
BS EN 61000-6-2 EMC immunity standard
BS EN 61000-6-4 EMC emission standard

Static Battery Charger

6UHfVfUf[Yf]g'a Ubi ZUVi fYX'k]h'gk]hV]b[!a cXY'UbX'GA 8'fVWbc'c[mUbX'ih\Ug'\] \ YZZV]bVWf
6UHfVfUf[Yf]g'a cXY'gfci hdi hJ !=VUfUfVf]gh]W]g]j YfmVcgy'hc'gei UfY'&(\$) \Ug'Z'`mici hdi hg\chVfVW]hdfchVW]cb UbX
ihVWb'VY i gYX'Ug'U'W'ffYbhgci fVW"
&(\$) \Uf[Yf\Ug'\] \ YZZV]bVW]cb["]Z'Z'`ck'ZU]i fY'fU]Z'] \ h\k Y] \ h\ubX'`ck' \ YUhfUX]UfYX']b' U]VW'fXUbW'k]h' "]bYUf
U'fYfbU]j Yg"
H\Y'VXUf[Yf]g'Z]hYX'k]h' U'dfchVW]cb'X]cXY'UW]cgg'h\Y'ci hdi h'7\Uf[Y'ZU]`ci hdi h]g'Uj U]UVY'"7cbbYVWUf[Y'ZU]`fY'Um
Vt'] VY]k YYb dcg]h]j Y ci hdi hUbX'7: ci hdi h'
hdi h'%*!&*(J"
Ci hdi h'&+Z'J') 5'cf%ž J') 5"

Engine : Doosan
Alternator : Mecc Alte
Control System : P 732 control system

MS 85 - Canopy

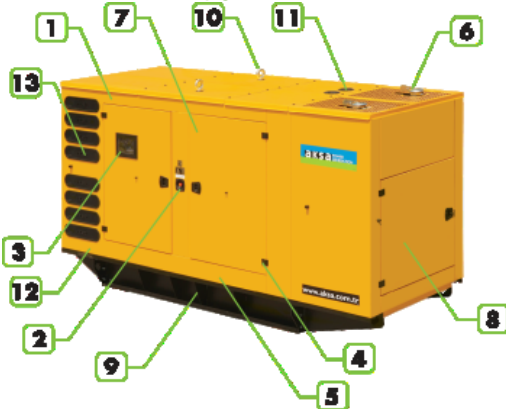

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

Introduction

Sound-attenuated and weather protective enclosures for generating sets meet even the sound requirements and provide optimum protection from inclement weather and development by our specialist acoustic engineers. Our modular designed sound insulated canopies provide ease of access for servicing and general maintenance and interchangeable components permitting on-site repair. Enclosures are designed to optimize genset cooling performance, providing you with confidence that genset ratings and ambient capability.

Standard Specifications

- Compact footprint, low profile design.
 - Enclosure, generator set, exhaust system and fuel tank are pre-assembled, pre-integrated and shipped as one package
 - Body made from steel components treated with polyester powder coating
 - Fire retardant foam insulation
 - Easy access to all service points
 - Exhaust system inside canopy
 - Large doors on each side
 - Control panel viewing window in a lockable access door
 - Emergency stop push button mounted on enclosure exterior
 - Cooling fan and battery charging alternator fully guarded
 - Fuel fill and battery can only be reached via lockable access doors.
 - Lifting points on the top of canopy and base frame
 - Customer options available to meet your applications needs.
- generating sets' noise level tests in accordance with directive 2000/14/EC validation of the noise level test has been approved by the notified body Szutest

Width	mm.	1606
Lenght	mm.	5297
Height	mm.	2656
Fuel Tank Capacity	L	1000